
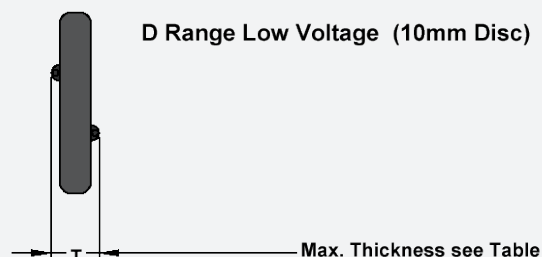



## D Range Low Voltage Metal Oxide Varistors (MOV)

Code	Product Marking	Max. Continuous Voltage AC rms @ 25°C	Max. Continuous Voltage DC @ 25°C	Varistor Voltage Min. @ 1mA	Max Energy 10/1000	Max Clamping Voltage @ Test Current		Peak Current 8/20	Continuous Power	Typical Capacitance	Max. T
		V	V	V	J	V	A	A	mW	pF	mm
ZL10D	18ZR10D	10	13	14.4	1.6	39	5	500	50	3800	5.0
ZL13D	22ZR10D	13	17	18.7	2.0	46	5	500	50	3600	5.0
ZL14D	24ZR10D	14	18	20.4	2.0	50	5	500	50	3500	5.0
ZL17D	27ZR10D	17	22	24.3	2.5	53	5	500	50	3300	5.0
ZL20D	33ZR10D	20	26	29.7	3.0	65	5	500	50	3000	5.5
ZL25D	39ZR10D	25	31	35.1	3.5	77	5	500	50	2700	5.5
ZL30D	47ZR10D	30	38	42.3	4.5	93	5	500	50	2300	6.0
ZL35D	56ZR10D	35	45	50.4	5.5	110	5	500	50	2050	5.5
ZL40D	68ZR10D	40	56	61.2	6.5	135	5	500	50	1750	5.5
ZL50D	82ZR10D	50	65	73.8	9.0	150	25	2500	250	1400	6.0
ZL60D	100ZR10D	60	85	90.0	13	175	25	2500	250	1200	6.0
ZL75D	120ZR10D	75	100	105	11	205	25	2500	250	550	5.5
ZL95D	150ZR10D	95	120	135	15	250	25	2500	250	400	5.5

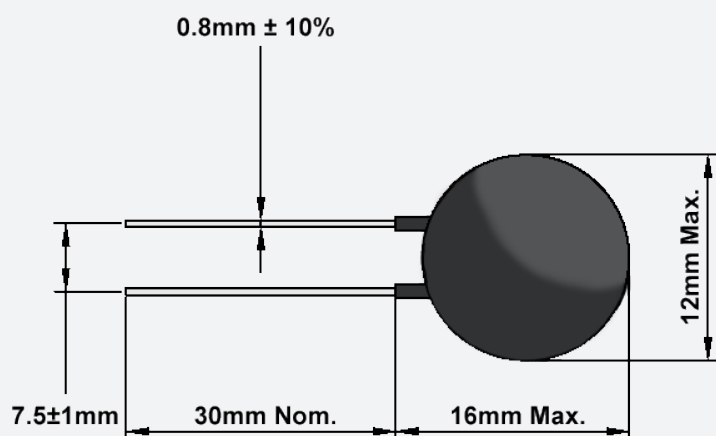

 Components are UL listed under the 'product marking' code in above table.

All of the above information, including drawings, illustrations and graphic designs, reflects our present understanding and is to the best of our knowledge and belief correct and reliable. Users, however, should independently evaluate the suitability of each product for the desired application. Under no circumstances does this constitute an assurance of any particular quality or performance. Such an assurance is only provided in the context of our product specifications or explicit contractual arrangements. Our liability for these products is set forth in our standard terms and conditions of sale.