## **ZOMM Series**



## (Zinc Oxide Military Modules) ZOMM 124/3L5/1/24

PD Devices Ltd manufacture a wide range of products to protect against the effects of high altitude detonation of Nuclear devices. The result of such an event is the generation of Electromagnetic Pulses which will induce a high voltage transient in exposed conductors.

The EMP can affect several thousands of square kilometres, with a magnitude of tens of kilovolts.


This could result in serious damage to insulation, cause breakdown of semiconductors and the consequent malfunction of critical equipment.

Most notable would be the failure of Energy Power Supply and Communications Systems. We offer products to satisfy protection for most applications

Specification					
Continuous Operating Voltage, AC rms	20V				
Continuous Operating Voltage, DC	26V				
Energy per channel (Joules)	6J				
Max. Peak Clamping Volts @ 10A	70V				
No. of channels	24				
50 Shot ( 4/20μs ) Repetitive Duty	300A				
Response Time	<10ns				
Continuous Current per Channel	5A				
Max. ( 8/20μs ) Current per Channel	1000A				
Leakage Current per Channel at Rated Voltage, DC	<50μΑ				
Through Inductance	<10µH				
Volts Drop	Negligible				
Terminations	1mm H.D.H.C. Tinned Copper				
Bushes	PTFE				



#### **Explanation of Order Code**

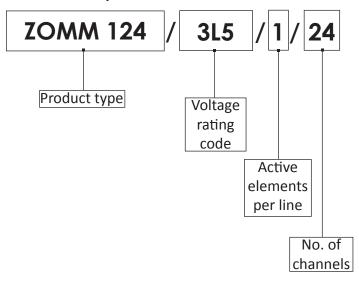

(XXX)			3L1	3L2	3L3	3L4	3L5	3L6	3L7	3L8	3L9	300	301	302	303	304
Continu	ious	AC (rms)	10	13	14	17	20	25	30	35	43	52	75	95	110	120
Operating Voltage		DC	12	16	18	22	26	31	38	45	55	66	95	125	143	156
Energy per channel (Joules)		(10/1000µs)	3.5	4.0	4.0	5.0	6.0	7.0	8.5	10.0	13.0	14.0	21.0	29.0	35.0	37.0
Max. Peak Clamping Volts @	104	10A (8/20μs)		50	55	60	70	80	95	110	135	-	-	-	-	-
	50A (8/20μs)		-	-	-	-	-	-	-	-	-	150	205	250	310	-
	200A (8/20μs)		-	-	-	-	-	-	-	-	-	-	-	-	-	345

To Base Plate

Revision: vPD2, 23/05/18
Information subject to change without notice

**Earth Connection** 


PD Devices reserves the right to amend specifications in line with product development.



### **ZOMM Series**




# (Zinc Oxide Military Modules) ZOMM 124/3L5/1/24

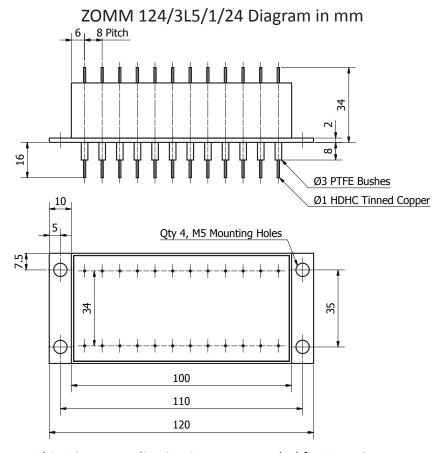

This ZOMM Application is recommended for Zone 2

#### **ZONE 0 (EXTERNAL- HOSTILE)**

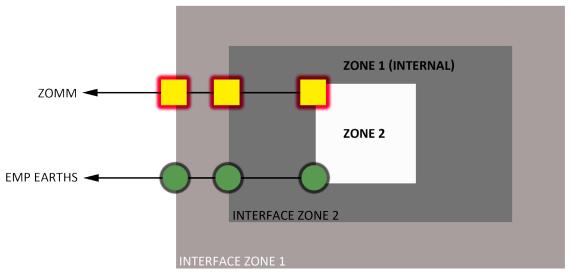

Revision: vPD2, 23/05/18
Information subject to change without notice.

INTERFACE ZONE 0

All of the above information, including drawings, illustrations and graphic designs, reflects our present understanding and is to the best of our knowledge and belief correct and reliable. Users, however, should independently evaluate the suitability of each product for the desired application.

